

MAGIC GRANITE

With the multi-tone combination of brilliant irorganic mineral flakes, a natural and coarse, yet exquisite granite look is created.



Join our photo contest to win RM1,000*

*Terms and conditions apply

Details at: www.suzuka.com.my/promotion/

SUZUKA® TEXTURE COATING



TEXTURE COATING



1808



STONY COAT


Using a combination of color sands, SUZUKA® Stony Coat crafts the authentic effects of natural stones. Its granular surface gives the wall a bold and prominent finish.

CERAMIC COAT

The blend of fine grandeur color sands forms a suave and refined texture, giving the walls an elegant and graceful outlook.

TEXTURE COATING PACKING & CONSUMPTION

Process	Product Code	Dilution	Packing	Number Of Coats	Coating Interval (Hrs)	Consumption	Coverage /Drum	Application Tools	
1	Surface Preparation	Surface shall be dry and free from dirt, oil, grease and other contaminants. All cracks or defective substrate shall be repaired with suitable cement filler.							
2	Primer	EMP	Max 5% with clean water	18L	1	3	0.15 - 0.20 ltr/m ²	90 - 120 m ²	Roller or Brush
3	Texture Coat	MGM	Max 5% with clean water	25 KG	1 - 2	24	4.2 - 5.0 kg/m ²	5 - 6 m ²	Spray Gun Nozzle (8mm)
		NSC	Max 5% with clean water	25 KG	1 - 2	24	4.2 - 5.0 kg/m ²	5 - 6 m ²	Spray Gun Nozzle (6.5mm)
		TC	Max 5% with clean water	25 KG	1 - 2	24	3.0 - 3.6 kg/m ²	7 - 8 m ²	Spray Gun Nozzle (5mm)
4	Top Coat	FSI	FSI Clear	15L	2	-	0.15 - 0.25 ltr/m ²	60 - 100 m ²	Roller or Brush

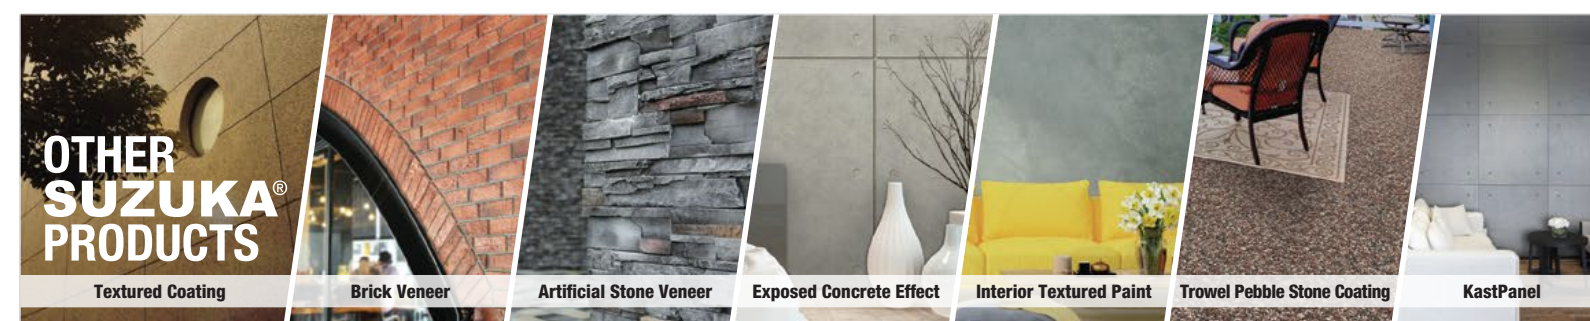

TAIWAN • MALAYSIA • THAILAND



suzuka.com.my


Instagram: suzuka_malaysia | Facebook: suzuka_malaysia | Hotline: 012-3595 677



SUZUKA®
MAGIC GRANITE



SUZUKA®
STONY COAT

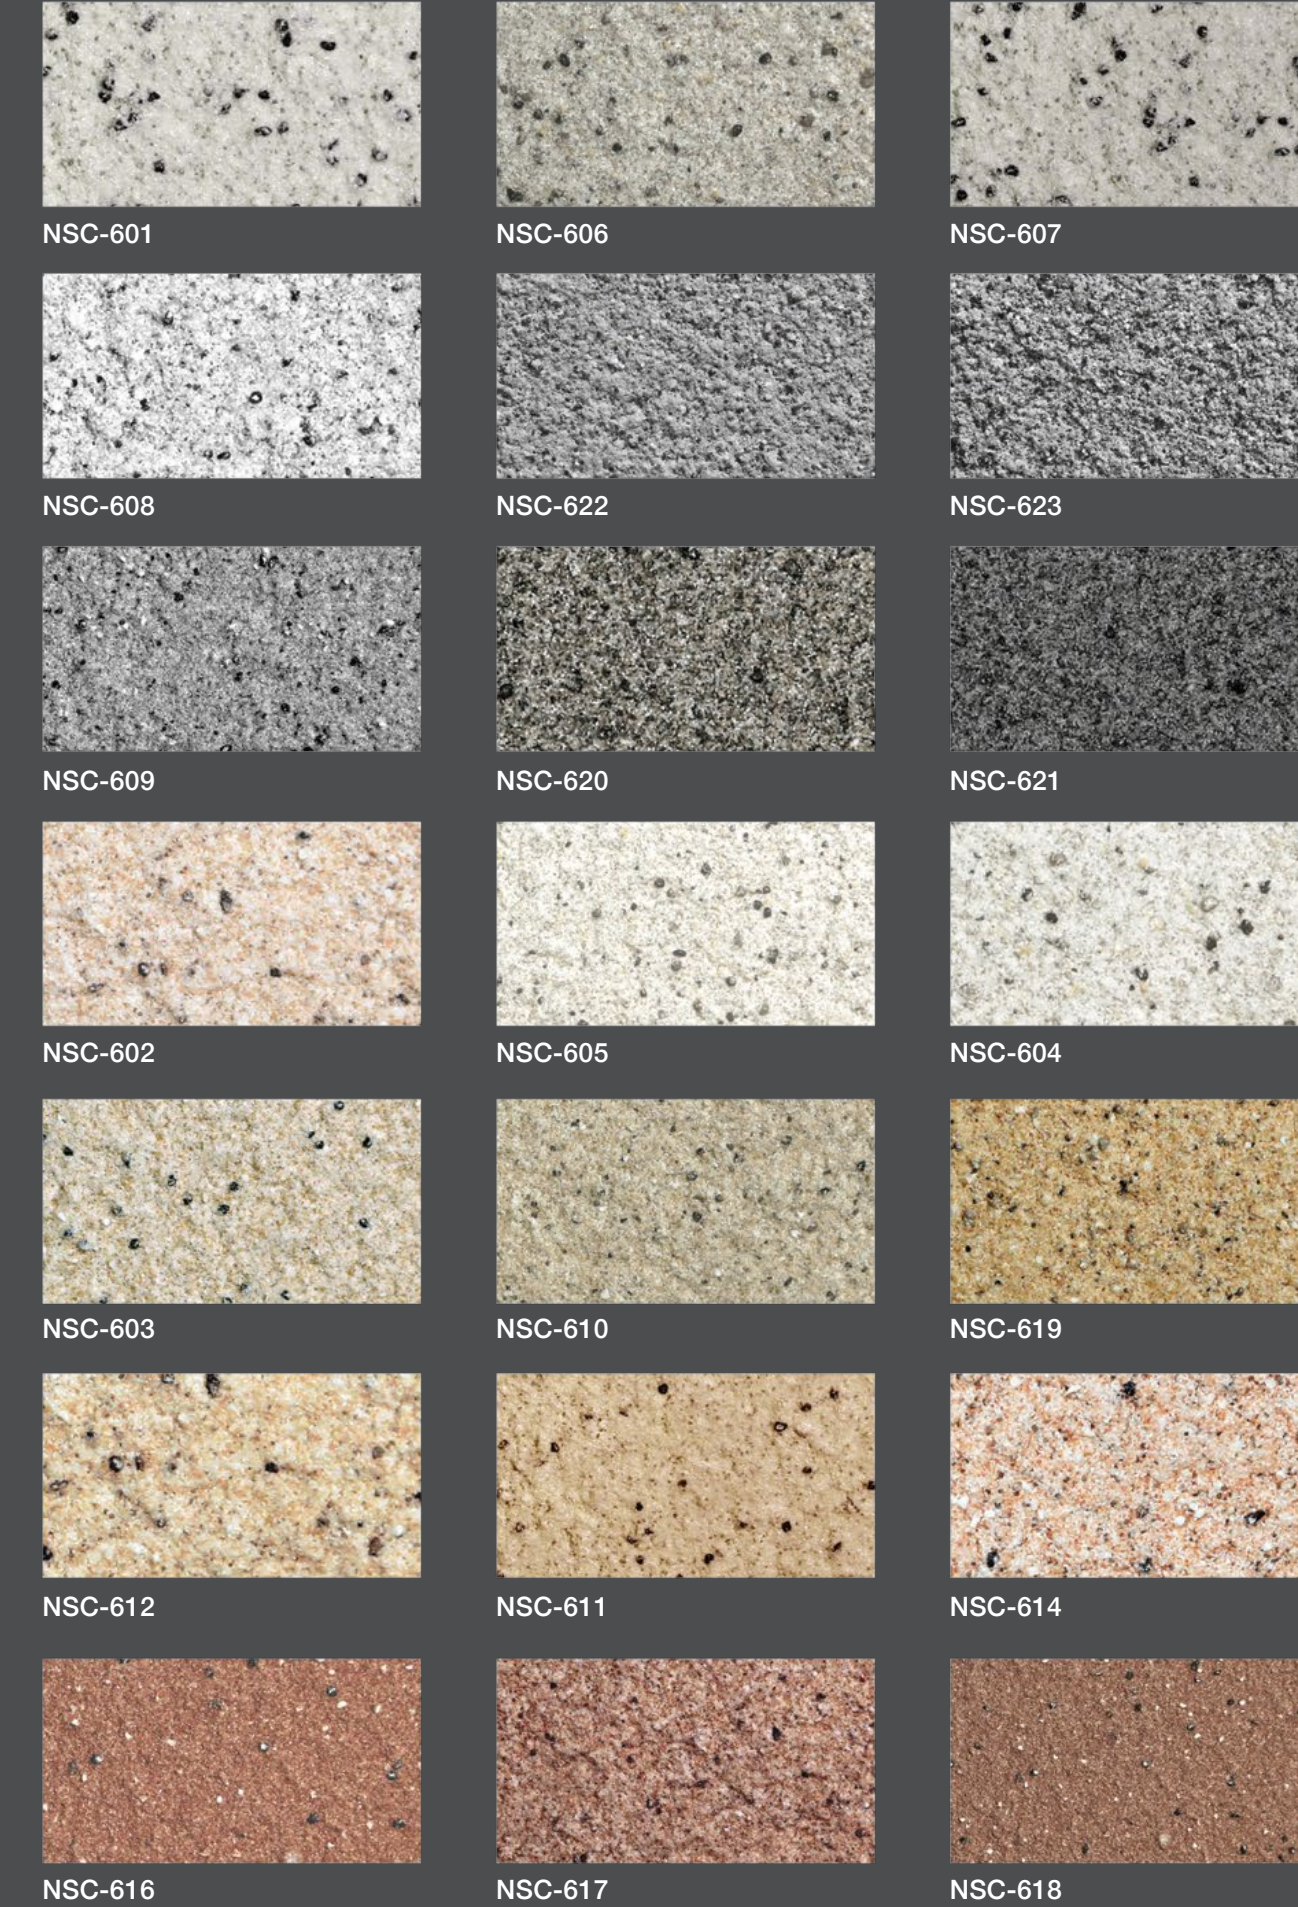

SUZUKA®
CERAMICS



• The main materials in the following samples are made of natural color sands and ceramics sands, thus the color may differ slightly.
• Due to the difference in the base of the surface, the color and pattern may differ.